



100 SERIES 35 5/8" SUB-FRAME CRITICAL DIMENSIONS

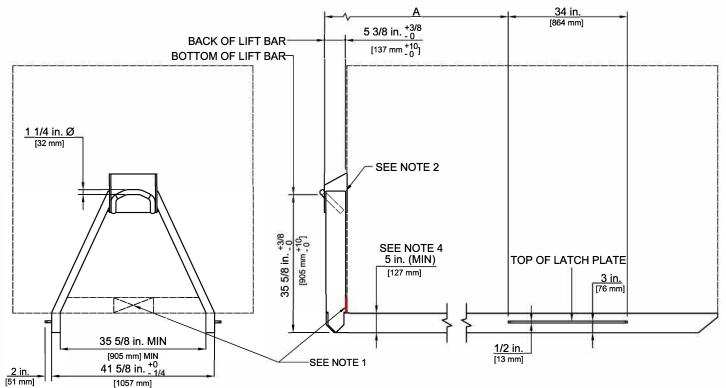



LIFT BAR DETAIL

		_
NIC	٦Т	_

- A STRUCTURAL JIB CONTACT POINT LOCATED AS LOW AS ALLOWABLE ON THE FRONT OF THE BODY IS REQUIRED.
- 2.) WELD HOOK GUARD TO BODY OR ADD STRUCTURAL SUPPORT AS NEEDED FOR THE APPLICATION.
- 3.) THIS DRAWING PROVIDES THE CRITICAL SUB-FRAME DIMENSIONS FOR COMPATIBILITY WITH THE SWAPLOADER HOOK LIFT HOIST. IT IS THE SUB-FRAME SUPPLIERS RESPONSIBILITY TO PROVIDE A SUB-FRAME OF SUFFICIENT CAPACITY WHICH PROPERLY SUPPORTS THE BODY/CONTAINER WHEN USED WITH THE HOOK LIFT HOIST.
- 4.) SWAPLOADER MANUFACTURED 100 SERIES A-FRAMES REQUIRE A 5 INCH LONGSILL HEIGHT.

L	100 SERIES SUB-FRAME DIMENSIONS			
HOIST COMPATABILITY		Α		
[SL-75/105	82 1/2" [2096 mm]		
[SL-112/145/160/180/185/212/214	95 1/2" [2426 mm]		
_				

400 OFFICE CUID FRAME DIMENCIONE



100 SERIES SUB-FRAMES

DRAWING NO. S-933 MODEL NO.

S-933 10/15/25