




SL-520X

HYDRAULIC ADJUSTABLE JIB

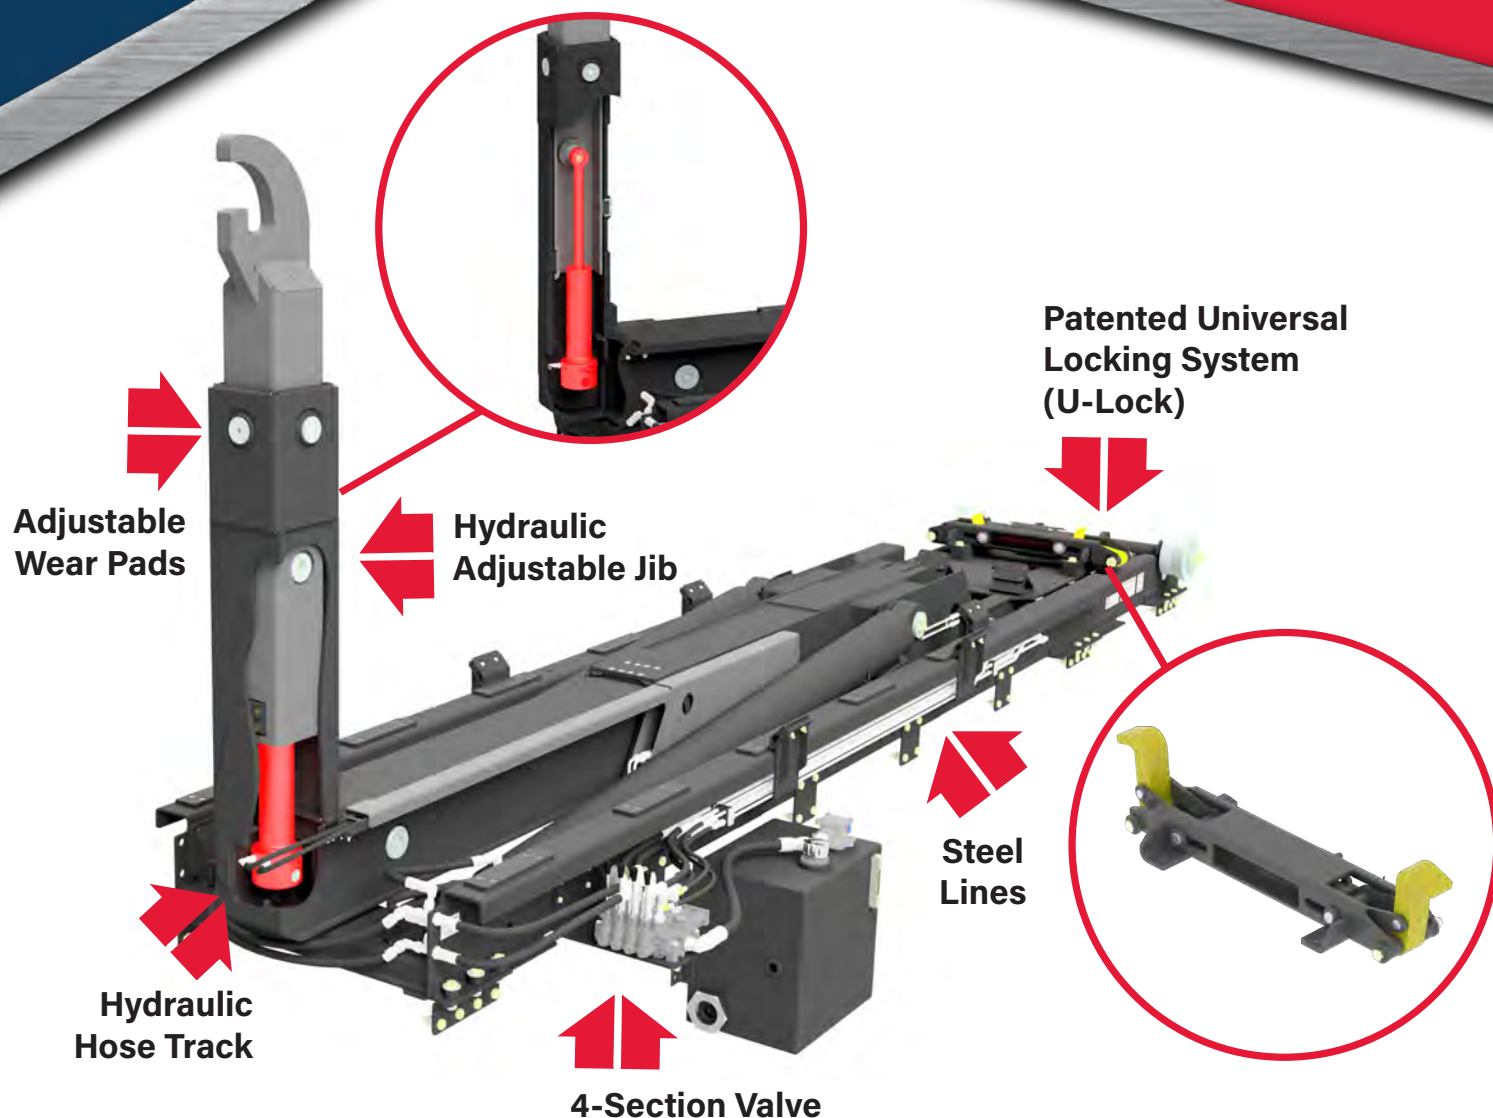

FEATURES INCLUDE

- ↔ 50,000 lb. Dump/Lift Capacity
- ↔ Hydraulic Adjustable Jib 53-7/8" or 61-3/4" Hook Height Option
- ↔ Potential Body Length: 17' - 24'
- ↔ Slide-through Body Lock or Optional Patented Universal Body Lock
- ↔ Powder Coat Finish
- ↔ Dual Lift/Dump Cylinders
- ↔ Dual Rear Pivot Section
- ↔ 5-yr. Limited Warranty



SL-520X

SPECIFICATIONS

MODEL	SL-520X	
MODEL DESCRIPTION	LIFT/DUMP CAPACITY (INCLUDING CONTAINER)	50,000 lb
	DUMP ANGLE	60°
	HOIST WEIGHT**	HYD. ADJ. 6,430 lb
GENERAL DIMENSIONS	HOOK TO REAR ROLLER	222.75"
	HOOK HEIGHT	HYD. ADJ. 61.75" / 53.88"
	HOIST HEIGHT	11.5"
	HOIST CG	115.9"
	OPTIMUM BODY LENGTHS	20' - 22'
	POTENTIAL BODY LENGTHS*	17' - 24'
	BODY LONGSILL WIDTH*	40.50" / 41.63"
HYDRAULIC SYSTEMS	HYDRAULIC PUMP TYPE (CID)	Bent Axis Piston (3.84)
	FLOW @ PUMP RPM*	21 GPM @ 1,300 RPM
	RELIEF PRESSURE	4,650 PSI
	HYDRAULIC RESERVOIR	25 gal
LIFT CYLINDER	QUANTITY	2
	BORE	Ø 6"
	STROKE	85.25"
JIB CYLINDER	QUANTITY	1
	BORE	Ø 4"
	STROKE	52"
HYDRAULIC CYLINDER	QUANTITY	1
	BORE	Ø 3"
	STROKE	7.88"
TRUCK SPECS (RECOMMENDED)	GVW RANGE*	50,000 lb or greater
	CAB-AXLE DIM.* (SINGLE AXLE)	N/A
	CAB-TRUNNION DIM. (TANDEM AXLE)	176" - 190"
	CLEAR FRAME RAIL*	246"
	FRAME HEIGHT	up to 45"
PTO SPECS (RECOMMENDED)	PUMP MOUNT*	Direct Mount SAE B-B, 4 Bolt Spline Shaft 1" 15T 16/32
	TORQUE REQUIRED	250 ft-lbf

*See All-Model Specifications literature for further information.

**Weight includes base hoist with installation kit and cylinder oil.



1800 Broadway Avenue, Des Moines, IA 50313-2644
 515-266-3042 888-767-8000 www.swaploader.com

© 2025 Swaploader, USA. All rights reserved. SWL-F-SL-520X-HYD 09.23.25