

# **HYDRAULIC BODY LOCKS**


UNIVERSAL HYDRAULIC BODY LOCK (U-LOCK) **OUTSIDE HYDRAULIC BODY LOCK (0-LOCK)** 

**UNIVERSAL HYDRAULIC BODY LOCK** (U-LOCK) US PATENT # 12280988B2

### **DESIGNED FOR**

36"- 54" Hook Heights - 5" and 6" Longsills 62" Hook Heights - 6" or 8" Longsills



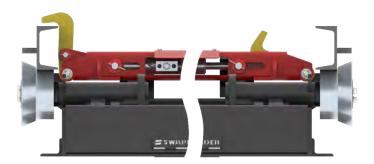

**ENGAGED** 

**DISENGAGED** 







### **FEATURES INCLUDE**

- Fits all standard SwapLoader hoists\*
- Designed for the securement of bodies not built to SwapLoader specifications
- U-Lock hydraulic cylinder with built-in counterbalance valve
  - \* SL-75 and ST-1614 Models Not Included.

- In-cab indicator light to notify the driver of the body lock engagement for safer operation
- Works with electric, pneumatic, or manual 3-section controls
- Simple to use; can engage in partially extended jib position if the mast lock is engaged





## **HYDRAULIC BODY LOCKS**

UNIVERSAL HYDRAULIC BODY LOCK (U-LOCK) **OUTSIDE HYDRAULIC BODY LOCK (O-LOCK)** 

**OUTSIDE HYDRAULIC BODY LOCK** (O-LOCK)

#### **DESIGNED FOR BODIES WITH**

I-Beam Longsills

**C-Channel Longsill Construction** 




**ENGAGED** 









#### **FEATURES INCLUDE**

- Fits SL-418X, SL-518X and SL-520X hoists
- Designed for the securement of bodies not built to SwapLoader specifications
- O-Lock hydraulic cylinder with built-in counterbalance valve
- In-cab indicator light to notify the driver of the body lock engagement for safer operation
- Works with pneumatic controls
- Simple to use; can engage in partially extended jib position if the mast lock is engaged







