


ST-1614 Hooklift Trailer

Features and Benefits (12,000 lb. Hoist Capacity)

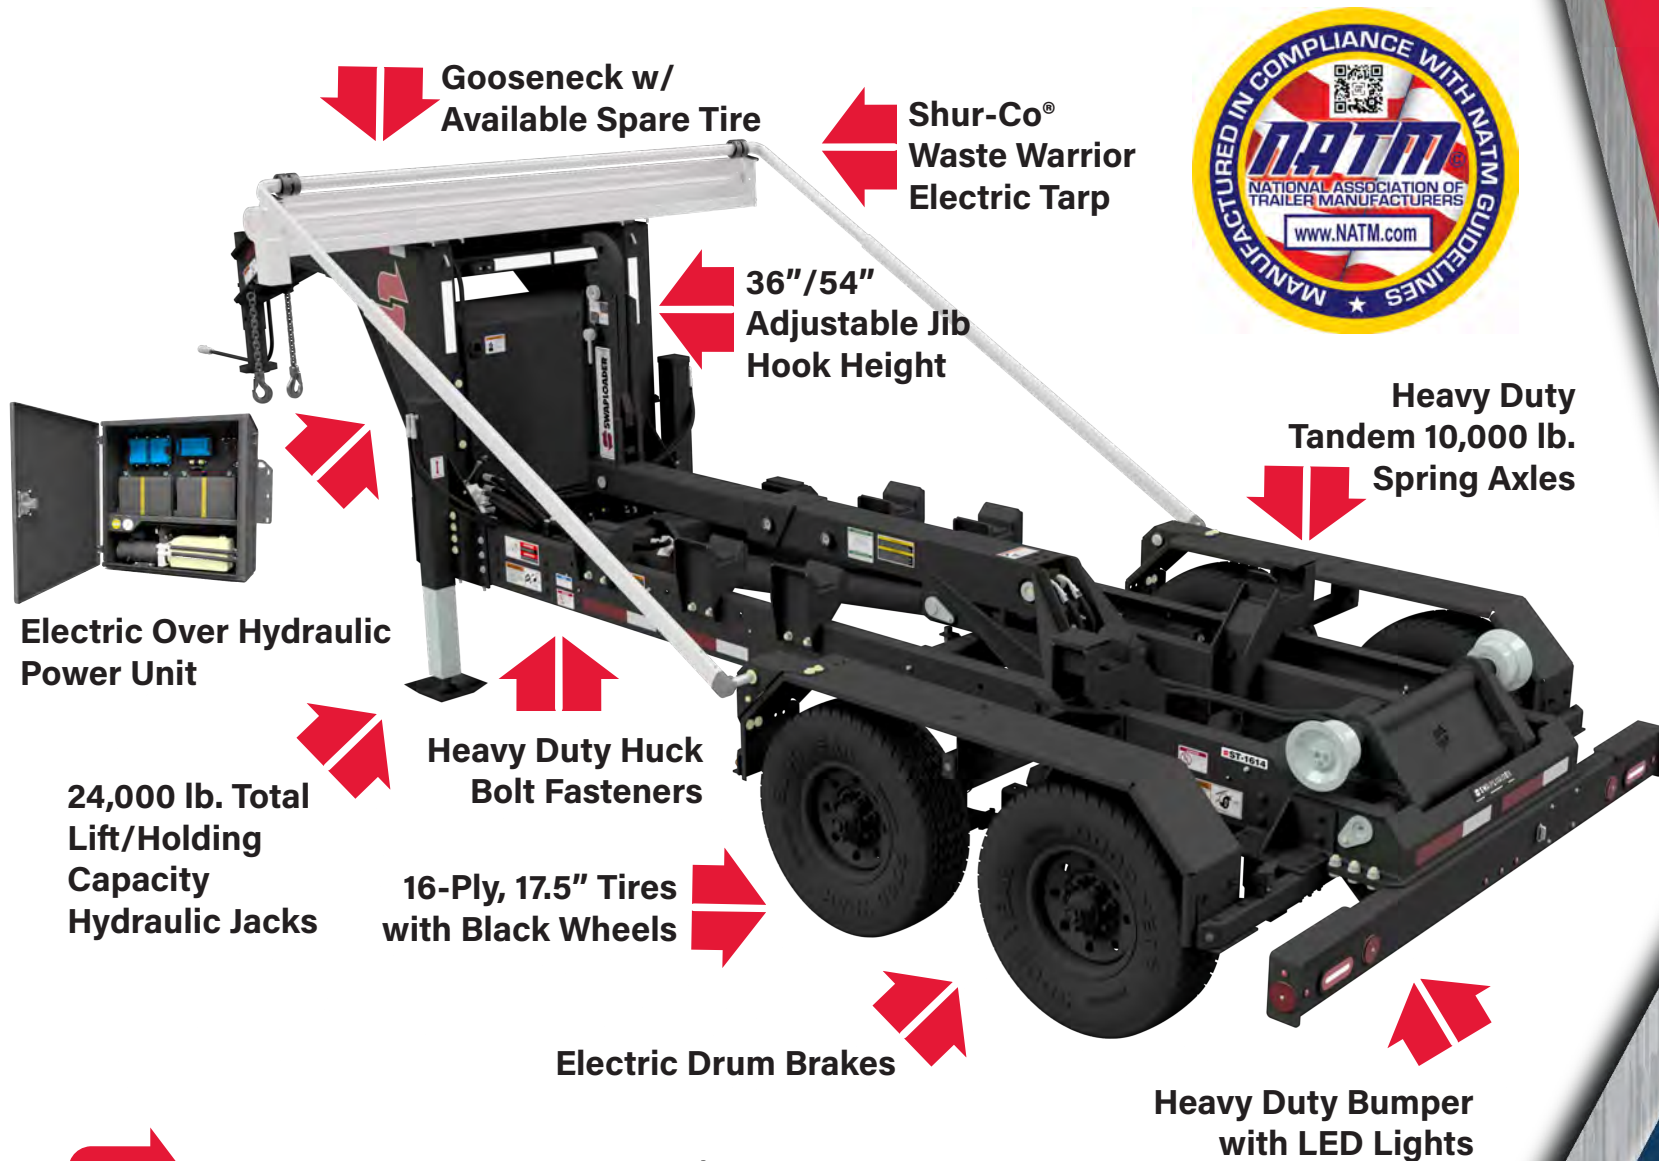

ST-1614

SWL-998-ST-1614-GN 0708.26
© 2026 Swaploader U.S.A. Ltd.
All rights reserved.

ST-1614 Hooklift Trailer Specifications

Gooseneck with Electric Power Unit

GVWR	16,000 lb.
Estimated Tare Weight	5,500 lb. (option dependent)
Hoist Capacity (Lift/Dump)	12,000 lb.
Body Length	12' - 14'
Hook Height	Adjustable 36"/54"
Hook to Roller Distance	168"
Coupler to Bumper Distance	287"
Coupler	2-5/16" Round Adjustable Pin, 25,000 lb.
Axles	Tandem 10,000 lb., Greased w/ Electric Drum Brakes
Tires	16-ply, 17.5", Black (ST215/75R)
Hydraulic Jacks	12,000 lb. Lift/Holding Capacity Each
Safety Chains	3/8" x 35" Chains, 16,200 lb. Minimum Breaking Force

Power Unit Motor	24V DC Bucher
Pump	3.1 GPM, Gear
Hoist Controls	Wireless Remote Controls Hoist & Tarp, Phone App w/ Diagnostics
Charging	110V AC Plug from Wall, 12V Anderson Connector from Truck Alternator
Batteries	(2) 12V Deep Cycle AGM31 (100Ah)
Operating Pressure	3,500 PSI
Jib Cylinder	3" Bore x 36" Stroke w/ Single Counterbalance Valve
Lift Cylinder	5" Bore x 51" Stroke w/ Dual Counterbalance Valves
Lighting	LED
Electric Plug	7-way RV
Trailer Finish	Black Textured Powder Coat
Tarp (Optional)	Shur-Co® Waste Warrior, Power Open/Close, Manual Gantry