



DIM.	SL-220	SL-222	SL-240	SL-330	SL-400	SL-412	SL-418X	SL-518X	SL-520X	SL-650
CT	148"-160"	134"-146"	118"-130"	124"-138"	124"-138"	103"-115"	158"-170"	158"-170"	178"-190"	183"-195"
TARP CT	160"-172"	146"-158"	130"-142"	138"-150"	138"-150"	115"-127"	170"-182"	170"-182"	190"-202"	195"-207"
REAR OH	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"	43"-31"
CLEAR FRAME	220"	206"	186"	195"	195"	173"	229"	229"	248"	252"

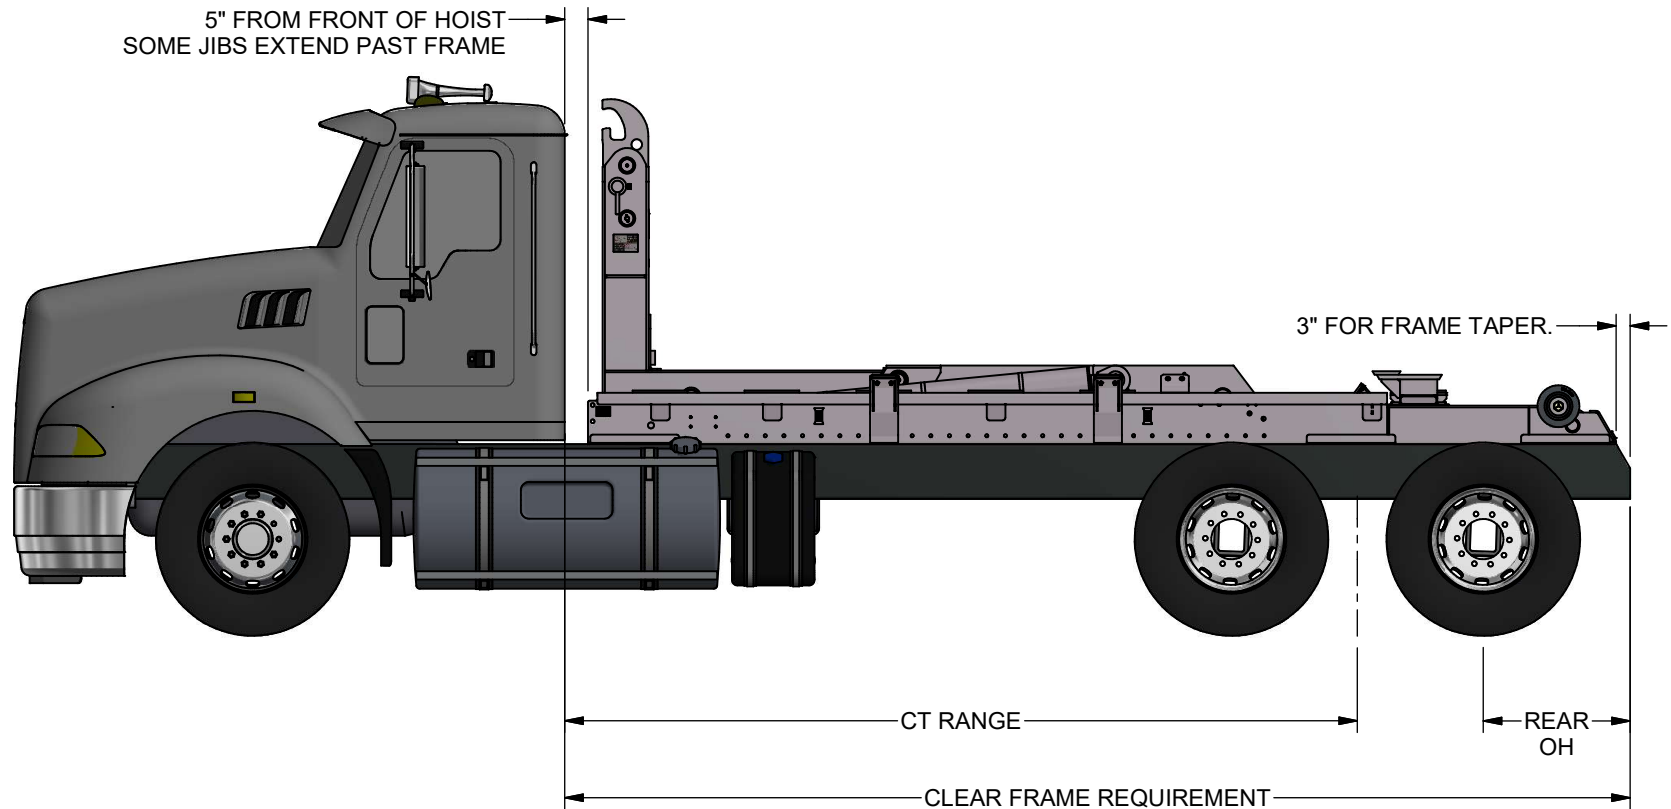

S942 4/3/2024 REV A

- THE LONGER CT DIMENSION LISTED IS OPTIMUM FOR WEIGHT DISTRIBUTION AND LIFTING STABILITY.
- TARP SYSTEMS ADD 12" TO CT DIMENSION AND CLEAR FRAME DIMENSION.
- TAKE 3" OFF OF CLEAR FRAME AND REAR OVERHANG MEASUREMENT IF CUTTING FRAME WITHOUT A TAPER.

 SWAPLOADER U.S.A. LTD.
TANDEM AXLE TRUCK
CLEAR FRAME AND CT
S942